

---

# Gladiatore Installation

Updated June 2023

---

## Gladiatore Fore End

Installation guide for Mossberg® Shockwave, M88, M500 and M590 pump shotguns.

Page 2

Install on a Maverick 88 - Page 8

## Gladiatore Stock

Guide for installing on a Mossberg® M88, M500 or M590 pump shotgun.

Page 4

## Gladiatore Club Grip

Guide for installing on a Mossberg® Shockwave pump shotgun.

Page 6

**CONFIRM COMPLIANCE WITH LOCAL AND FEDERAL REGULATIONS PRIOR TO INSTALLING.  
CONFIRM YOUR SHOTGUN IS UNLOADED PRIOR TO INSTALLATION.**

---



## Gladiatore Fore End

The Gladiatore Fore End is compatible ONLY with Mossberg® pump shotgun models Shockwave, M88, M500 and M590, and ONLY those with 6.5" action tubes.

**CONFIRM COMPLIANCE WITH LOCAL AND FEDERAL REGULATIONS PRIOR TO INSTALLING.**

**CONFIRM YOUR SHOTGUN IS UNLOADED PRIOR TO INSTALLATION. GOOD? CHECK AGAIN.**



### Step 1.

Remove the action tube cap by unscrewing counter-clockwise.



### Step 2.

Sliding the fore end rearward to relieve tension on the barrel. Remove the barrel by sliding it away from the action. Slide the fore end forward for the next step.




### Step 3.

Using the included Fore End Removal Wrench, remove the action tube nut by aligning the protrusions of the wrench with the notches of the nut. Turn counter-clockwise until nut is removed.



### Step 4.

Slide the pump off the action tube.

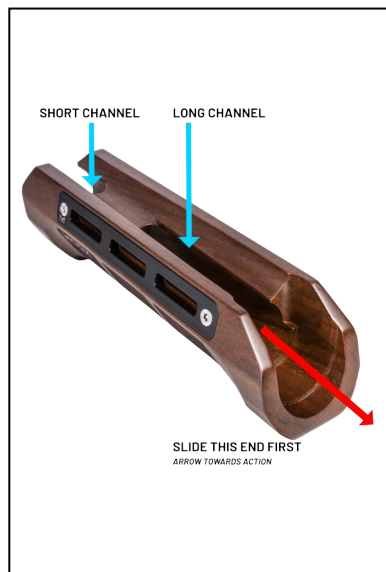


### Step 5.

Orient the Gladiatore Fore End so the longer channel is closest to the action then slide it over the action tube towards the action.






## Gladiatore Fore End

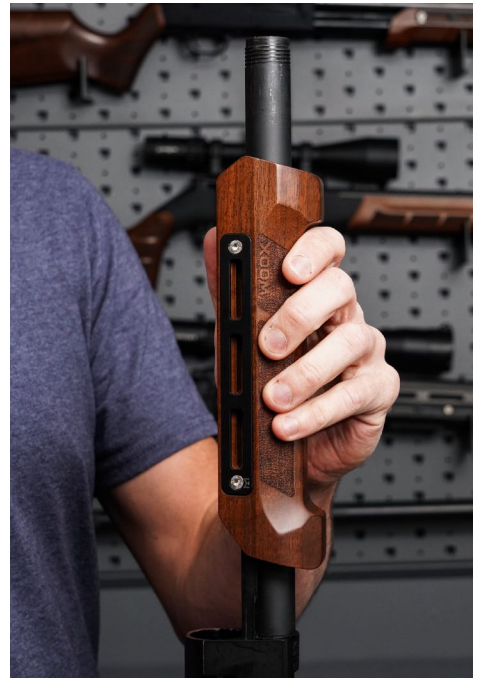

### Step 6.

Using the included Fore End Removal Wrench, replace the action tube nut.

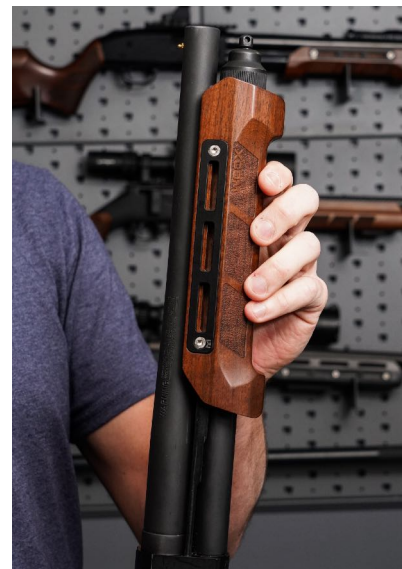

### Step 7.

Slide the barrel over the action tube. Move the fore end rearward so the barrel seats completely.

### Step 8.

Replace the end cap.

### Step 9.

Operate the pump action to ensure proper function.

# Gladiatore Stock


The Gladiatore Stock is compatible ONLY with Mossberg® pump shotgun models M88, M500 and M590.

**CONFIRM COMPLIANCE WITH LOCAL AND FEDERAL REGULATIONS PRIOR TO INSTALLING.**

**CONFIRM YOUR SHOTGUN IS UNLOADED PRIOR TO INSTALLATION. GOOD? CHECK AGAIN.**

The Gladiatore Stock includes hardware for proper installation. Using a hex wrench or size T30 star screwdriver, unscrew the bolt on the underside of the stock. At the front of the stock, unscrew and discard the nut, then remove and set aside the spacer for Step 3. Grab the protruding screw and firmly pull until the screw and mounting sleeve come free of the stock. Set this aside for Step 4.

**TOOLS NEEDED FOR INSTALLATION:** #2 Phillips screwdriver, 1/4" screwdriver bit, 5mm bit, 1/2" socket with long extension

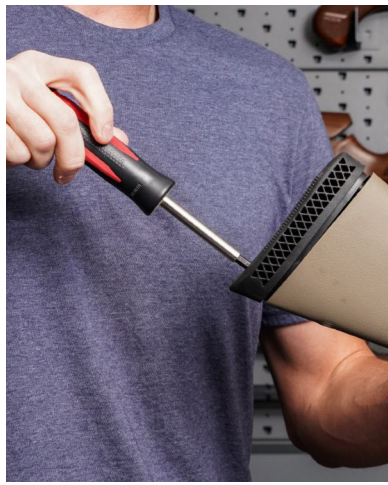

## Step 1.

Remove the butt pad screws with a #2 Phillips screwdriver and pull the butt pad from the stock.



## Step 2.

Remove the bolt that secures the stock to the action with a 1/2" socket and long extension. Remove the stock.

## Step 3.

Place the included spacer over the screw hole opening in the rear of the action. Orient the spacer so the open end is below the opening and the recessed side is against the action.



## Gladiatore Stock



### Step 4.

Place the included short hex cap screw into the side opening of the included mounting sleeve and screw into the rear of the receiver. The mounting sleeve should be angled downward when complete.



### Step 5.

Slide the stock on to the mounting sleeve. Insert the included long hex cap into the bottom of the stock and tighten until secure with a 5mm bit. Your stock includes four spacers beneath the butt pad that may be removed to achieve a proper fit. To remove the butt pad, use a T15 Star screwdriver bit.

# Gladiatore Club Grip

The Gladiatore Club Grip is compatible with Mossberg® Shockwave pump shotgun.

**CONFIRM COMPLIANCE WITH LOCAL AND FEDERAL REGULATIONS PRIOR TO INSTALLING.**

**CONFIRM YOUR SHOTGUN IS UNLOADED PRIOR TO INSTALLATION. GOOD? CHECK AGAIN.**

The Gladiatore Club Grip includes hardware for proper installation. At the front of the Grip, unscrew and discard the nut, then remove and set aside the screw for Step 3.



## Step 1.


Using a flathead screwdriver, pry open the cover on the rear of the Shockwave and remove.



## Step 2.

Remove the screw that secures the stock to the action. Remove the stock.

# Gladiatore Club Grip

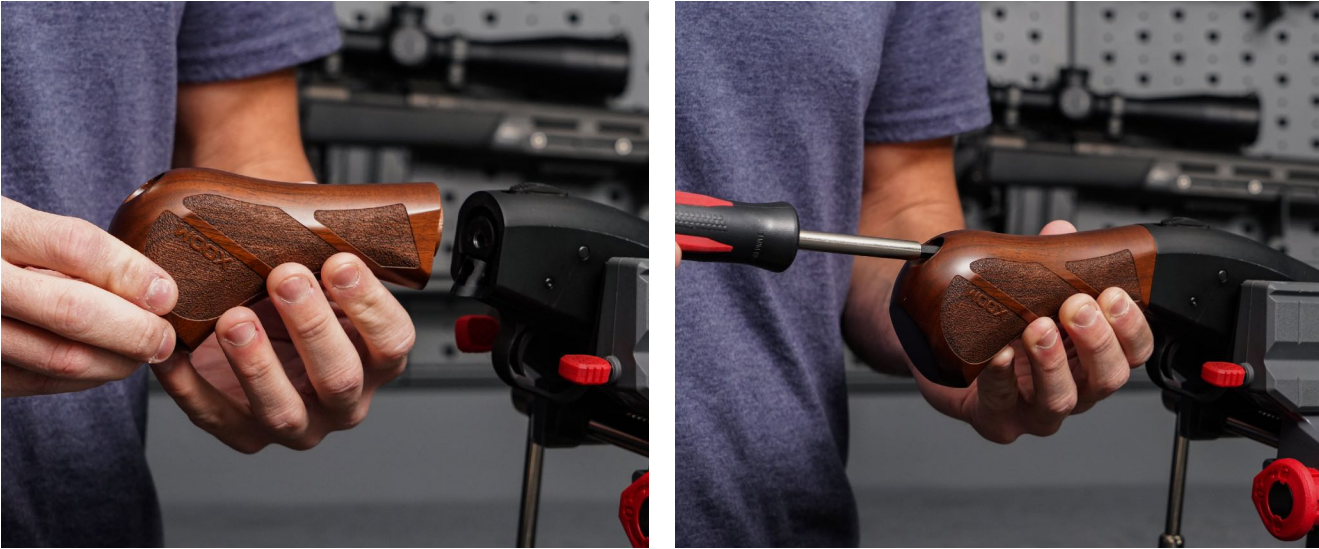

### Step 3.

Align the Club Grip with the hole in the rear of the receiver. Insert the hex screw and tighten until secure.



---

# Gladiatore Fore End Installation for Maverick 88

February 2023

---



- **CONFIRM COMPLIANCE WITH LOCAL AND FEDERAL REGULATIONS PRIOR TO INSTALLING.**
- **CONFIRM YOUR SHOTGUN IS UNLOADED PRIOR TO INSTALLATION.**

---

Due to the fact the Mossberg Maverick 88 has a pinned fore end (as opposed to the action slide tube and nut on the 500 and 590), the instructions for our Gladiatore Stock & Fore End Kit are slightly different than those of the 500 and 590. But rest assured you can still enjoy WOOX's sophisticated Italian design and genuine American walnut furniture on your Maverick 88. Below, we will describe the minor differences and how you can accomplish this with a few steps and additional parts.

As mentioned above, one of the biggest differences between the Maverick 88 and the Mossberg 500/590, when it comes to installing the WOOX Gladiatore Stock & Fore End Kit, is the pinned fore end on the Maverick 88. The fore end on the Maverick 88 is a one piece action slide tube molded into a polymer fore end. This means fore end can not be replaced without also purchasing a new action slide tube and nut directly from Mossberg. We have linked the 6  $\frac{3}{4}$ " action slide tube you need directly from Mossberg as well as thorough instructions on how to install everything.

*Note: This item can also be found from retailers like Midway USA, Ebay, and others.*

Mossberg 6  $\frac{3}{4}$ " Action Slide Tube, 12 ga: <https://www.mossberg.com/action-slide-12-gauge-6-3-4-blued-12362bl.html>

Action Slide Nut: <https://www.mossberg.com/action-slide-nut-12-gauge-blued-for-6-3-4-slide-assembly-13488.html>

---



# Gladiatore Fore End Installation for Maverick 88

**CONFIRM COMPLIANCE WITH LOCAL AND FEDERAL REGULATIONS PRIOR TO INSTALLING.  
CONFIRM YOUR SHOTGUN IS UNLOADED PRIOR TO INSTALLATION. GOOD? CHECK AGAIN.**



## Step 1.

Remove the action tube cap by unscrewing counter-clockwise.




## Step 2.

Sliding the fore end rearward to relieve tension on the barrel. Remove the barrel by sliding it away from the action. Slide the fore end forward for the next step.



## Step 3.

Remove the pin securing the trigger assembly using a punch or small screwdriver to push it through (it is held in place by tension). Once the pin is removed, remove the trigger group assembly.

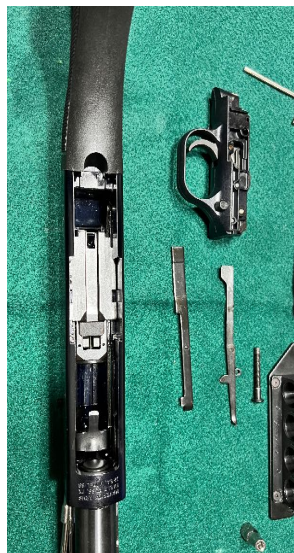

## Gladiatore Fore End Installation for Maverick 88



### Step 4.

Carefully remove the entire factory fore end from your Maverick 88. There are two arms that extend from the factory fore end into the bolt/trigger housing so simply give a good tug outwards on the fore end and the entire assembly will come out as one piece.



### Step 5.

Insert the new Mossberg 6 3/4" Action Slide Tube into the WOOX Gladiatore fore end.



## Gladiatore Fore End Installation for Maverick 88



### Step 6.

Carefully screw the action slide tube nut onto the action slide tube and finger-tighten to your WOOX fore end. Take care as there are fine threads attaching the nut to the action slide tube. Use the provided WOOX Action Tube Nut Wrench to fully tighten.



### Step 7.

Insert the new action slide tube with WOOX fore end over your magazine tube and push the slide tube arms into the corresponding holes and into the bolt/trigger assembly housing. Ensure the action slide tube arms go into the appropriate slots in the bolt/trigger housing.

### Step 8.

Reinstall the trigger group.

You have now installed the WOOX Fore End to your Maverick 88. Cycle the action to ensure proper installation.

---

## Need help?

We've got you. Visit the links to get the answers you need.

### Send a message.

<https://wooxstore.com/pages/contact-us>

### 100 Years of Support

<https://wooxstore.com/pages/woox-limited-warranty>



## Thank you.

Your business supports teams in Italy and Hickory, North Carolina, all dedicated to delivering premium outdoor gear your heirs will fight over. Every indescribably stunning creation is backed by 100 Years of Support.




Visit [wooxstore.com](https://wooxstore.com) to see our full line of stocks, knives and axes



---

**WOOX**  
FOR THE GREAT OUTDOORSMAN

1269 19th St Ln NW  
Hickory, NC 28601  
[contact@wooxcompany.com](mailto:contact@wooxcompany.com)  
[wooxstore.com](https://wooxstore.com)

 [linkedin.com/company/woox-llc](https://www.linkedin.com/company/woox-llc)  
 [@woox.outdoor](https://www.instagram.com/woox.outdoor)  
 [facebook.com/WOOX.outdoor](https://www.facebook.com/WOOX.outdoor)